


# LSU 30-30-30 INSTALLING

## Asphalt Laminated Underlayment

THE TWO BASIC SUB FLOOR INSTALLATION ENVIRONMENTS MUST HAVE SMOOTH, CLEAN, DRY, FLAT AND SOUND SURFACES

WOOD SUB FLOOR

CONCRETE SUB FLOOR

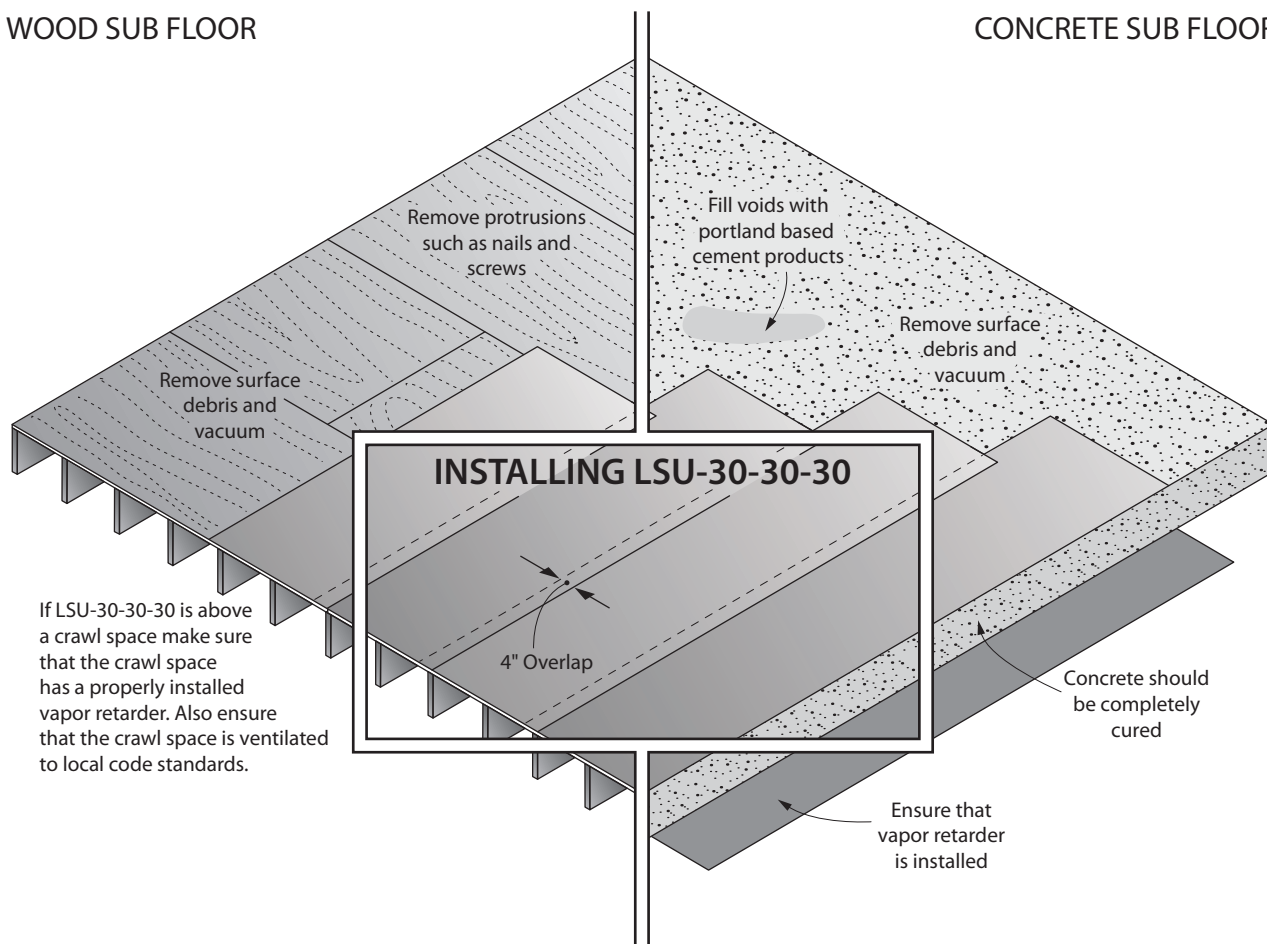

### OTHER CONSIDERATIONS

The installer is responsible to see that all local codes and flooring manufacturers requirements are met. For additional detailed information go to the NWFA (National Wood Flooring Association) Web site [nwfa.org](http://nwfa.org).



We warrant our materials to be of good quality and will replace materials found defective, providing, however, that the buyer shall examine the materials when received and promptly notify us of any defects before the materials are used or incorporated into a structure for which they are intended. *Visit our Website for full Warranty.*

**JACKSON**  
BUILDING PRODUCTS